

PC **Industrial**  
OK3-W07A-BT  
**Compacto**

Hoje, mais e mais clientes estão procurando serviços avançados.

Melhore a sua plataforma de serviços com soluções de automação com a linha compacta de PC's Industriais, que tem funções de comunicação avançadas.

PC Industrial  
**Compacto**

Modelo  
**OK3-W07A-BT**  
**7"**



*Principais*  
**Características**

Painel compacto e fácil instalação:

- W7" painel com IP65 proteção frontal
- Painel compacto e simétrico que permite utilização em modo retrato ou paisagem
- Design de encaixe com fácil instalação




## Modelos Especificação

Modelo		OK3-W07A-BT
<b>LCD</b>	Tamanho	7"
	Resolução	1024 x 600
	Brilho (cd/m2)	500
	Contraste	700 : 1
	Pixel Pitch (mm)	0.05(H) x 0.15(V)
	Viewing Angle (H-V)	150° / 145°
<b>Touch</b>	Touch Screen	projected capacitive type with USB interface
	Touch Controller	EETI EXC7200
<b>System</b>	CPU	Intel® Celeron® N2807 dual core 1.58 GHz
	RAM	2GB DDR3L Onboard RAM
	Ethernet	Realtek RTL8111E PCIe GbE controller
	Audio Codec	Realtek ALC892 HD Audio codec
	Storage	mSATA
	Input/Output	1 x RS-232 COM port 1 x RS-232 COM port 2 x USB 3.0 2 x Gigabit Ethernet ports (RJ-45) 1 x Power switch 1 x Reset button 1 x AT/ATX switch 1 x Line-out 1 x 9 V-30 V lockable DC jack
<b>Audio</b>		1 x AMP 2W (internal speaker)
<b>System Cooling</b>		Fanless
<b>Wireless</b>		IEEE 802.11a/b/g/n/ac 1T1R module
<b>Physical</b>	Construction Front Bezel	PC + ABS plastic
	Mounting	Wall, Panel, Stand, Rack Mounting (VESA 75 mm x 75 mm)
	Color	Black
	Dimensions (WxHxD)(mm)	190.9 x 127.3 x 43.4
	Cut-out(WxH)(mm)	182 x 111
<b>Environment</b>	Operating Temperature (°C) (Ambient with air flow)	-20°C~50°C
	Storage Temperature (°C)	-20°C~60°C
	Humidity	10% to 95% (non-condensing)
	IP Level	IP65 front
	Safety/EMC	CE/FCC
	Net Weight (kgs)	0.73
<b>Power</b>	Power Supply	P/N: 63000-FSP036RAB610-RS 36W power Adapter Input: 90VAC~264VAC, 50/60Hz Output: 12VDC
	Power Requirement	9 V-30 V DC

## Display System

### OK3-W07A-BT

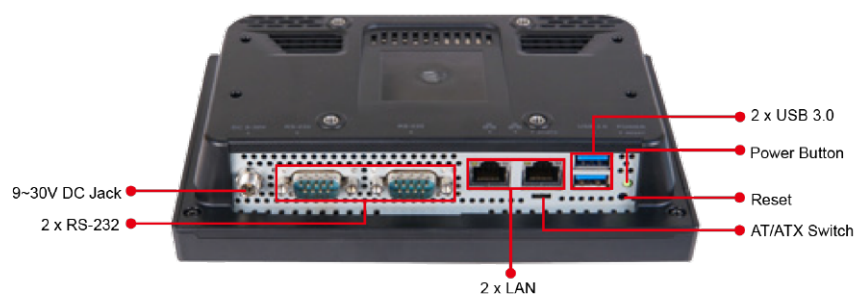

## Display Dimensões (mm)

